

UNICON STANDARD PRODUCTS

Unicon has a broad and well-documented product range, ready for production and delivery. The programme includes standard products and functional concrete types, produced and verified in accordance with current product standards.

In addition, a number of functional concrete types are declared according to own declaration.

ENVIRONMENTAL IMPACTS Includes the following exposure classes according to EN 206											
PASSIVE	MODERATE	AGGRESSIVE	EXTRA AG- GRESSIVE								
X0	XC2	XD1	XD2								
XC1	XC3	XS1	XD3								
	XC4	XS2	XS3								
	XF1	XF2	XF4								
	XA1	XF3	XA3								
		XA2									

RECLAIMED CRUSHED AGGREGATE

Unicon replaces up to 20% of the coarse aggregate with reclaimed crushed aggregate in concrete for passive environmental impact which is the maximum permissible level according to the current concrete standard (DS/EN 206 DK NA), Annex E. In addition, it is also possible to deliver functional concrete types such as kerb concrete with up to 100% substitution of the coarse aggregate. The reclaimed crushed aggregate primarily originates from our own return concrete, which is thereby recycled. This circular initiative became standard in 2020 and, in 2021, will mean a reduction by approx. 20,000 tonnes of virgin raw materials.

STANDARD PRODUCTS ACC TO DS/EN 206 DK NA

DKK PER M3 EXCL. VAT

COMPRESSIVE STRENGTH CLASS CYLINDER/CUBE COMPRESSIVE STRENGTH	C12 /15	C16/20	C20 /25	C25 /30	C30 /37	C35/45	C30/37	C35/45	C40 /50
ENVIRONMENTAL IMPACT	Passive	Passive	Passive	Passive	Passive	Passive	Moderate	Aggressive	Extra ag- gressive
SLUMP CONCRETE DMAX 32 MM, SLUMP 40-120 MM	1,112	1,143	1,174	1,206	1,239	1,272	1,394	1,600	1,688
CO₂ EQ. PER M³	175 kg	205 kg	220 kg	245 kg	275 kg	305 kg	290 kg	370 kg	440 kg
LAVA BETON® (SCC-CONCRETE) DMAX 16 MM, SLUMP-FLOW 550 MM			1,305	1,336	1,370	1,404	1,484	1,709	1,800
CO ₂ EQ. PER M ³			230 kg	280 kg	300 kg	350 kg	310 kg	400 kg	470 kg

FUNCTIONAL CONCRETE ACC TO DS/EN 206 DK NA

DKK PER M3 EXCL. VAT

TOTOTIONAL CONCRETE ACC TO BS/EN 200 BK NA					I LIVIVI L	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
C20 /25	C25 /30	C30 /37	C35/45	C30 /37	C35/45	C40 /50
Passive	Passive	Passive	Passive	Moderate	Aggressive	Extra ag- gressive
	1,351					
	270 kg					
	1,416					
	270 kg					
		1,405				
		290 kg				
		1,470				
		290 kg				
			1,530			
			320 kg			
					1,729	1,816
					410 kg	480 kg
	1,417	1,453	1,488	1,555	1,778	1,870
	280 kg	310 kg	350 kg	340 kg	390 kg	450 kg
	C20 /25	C20/25 C25/30 Passive Passive 1,351 270 kg 1,416 270 kg	C20/25 C25/30 C30/37 Passive Passive Passive 1,351 270 kg 1,416 270 kg 1,405 290 kg 1,470 290 kg	C20/25 C25/30 C30/37 C35/45 Passive Passive Passive 1,351 270 kg 1,416 270 kg 290 kg 1,470 290 kg 1,530 320 kg 1,417 1,453 1,488	C20/25 C25/30 C30/37 C35/45 C30/37 Passive Passive Passive Moderate 1,351 270 kg 40.00	C20/25 C25/30 C30/37 C35/45 C30/37 C35/45 Passive Passive Moderate Aggressive 1,351 270 kg 4

UNI-GREEN®

NEW SUSTAINABLE PRODUCTS WITH 25% CO2 REDUCTION

UNI-Green® is a product category in rapid development where the focus is on reducing the CO₂ footprint – everything equal. Here are our most sustainable concretes with a CO₂ footprint which has been reduced by 25% compared to the baseline for product phases A1-A3.

UNI-Green® products cannot be used for construction parts in exposure classes XS2, XS3 or XA3. These are described in more detail in DS/EN 206 DK NA.

Some lead time can be expected, which is why ordering well in advance is recommended.

* Baseline for the stated environmental impacts (kg CO₂ eq. per m³ concrete) is the Ready-mix Concrete Association's (Fabriksbetonforeningen's) third-part verified industry EPDs (environmental product declarations) as of 20 July, 2020. Where there is NO "overlap", the values are determined on the basis of average mix designs across our plants. All values are rounded up to a multiple of 5.

25% CO, REDUCTION

As a new feature, CO_2 emissions per m³ of concrete, applicable to product phases A1-A3, is stated for each concrete type, cf. EN 15804. These phases include the procurement of all raw materials and products for concrete production, transport to production, internal transport, mixing process and waste treatment until "end of waste" or final disposal.

UNI-GREEN® STANDARD PRODUCTS ACC TO DS/EN 206 DK NA



DKK PER M3 EXCL. VAT

COMPRESSIVE STRENGTH CLASS CYLINDER/CUBE COMPRESSIVE STRENGTH	C12 /15	C16/20	C20 /25	C25 /30	C30 /37	C35/45	C30 /37	C35 /45	C40 /50
ENVIRONMENTAL IMPACT	Passive	Passive	Passive	Passive	Passive	Passive	Moderate	Aggressive	Extra ag- gressive
UNI-GREEN®/ SLUMP CONCRETE DMAX 32 MM, SLUMP 40-120 MM	1,223	1,257	1,291	1,327	1,363	1,399	1,533	1,760	1,857
CO₂ EQ. PER M³	135 kg	155 kg	165 kg	185 kg	210 kg	230 kg	220 kg	280 kg	330 kg
UNI-GREEN® / LAVA BETON® (SCC-CONDMAX 16 MM, SLUMP-FLOW 550 MM	NCRETE)		1,436	1,470	1,507	1,544	1,632	1,880	1,980
CO ₂ EQ. PER M ³			175 kg	210 kg	225 kg	265 kg	235 kg	300 kg	355 kg

UNI-GREEN® FUNCTIONAL CONCRETE ACC TO DS/EN 206 DK NA



DKK PER M3 EXCL. VAT

COMPRESSIVE STRENGTH CLASS CYLINDER/CUBE COMPRESSIVE STRENGTH	C20 /25	C25 /30	C30 /37	C35 /45	C30 /37	C35/45	C40 /50
ENVIRONMENTAL IMPACT	Passive	Passive	Passive	Passive	Moderate	Aggressive	Extra ag- gressive
UNI-GREEN® / FLOOR CONCRETE G1 (M STONE) DMAX 32 MM, SLUMP 80-120 MM		1,486					
CO₂ EQ. PER M³		205 kg					
UNI-GREEN® / FLOOR CONCRETE G1 (A STONE) DMAX 32 MM, SLUMP 80-120 MM		1,558					
CO ₂ EQ. PER M ³		205 kg					
UNI-GREEN°/ FLOOR CONCRETE G2 (M STONE) DMAX 32 MM, SLUMP 80-120 MM			1,546				
CO ₂ EQ. PER M ³			220 kg				
UNI-GREEN°/ FLOOR CONCRETE G2 (E STONE) DMAX 32 MM, SLUMP 80-120 MM			1,617				
CO ₂ EQ. PER M ³			220 kg				
UNI-GREEN°/ FLOOR CONCRETE G3 (E STONE) DMAX 32 MM, SLUMP 80-120 MM				1,683			
CO₂ EQ. PER M³				240 kg			
UNI-GREEN°/ CONCRETE FOR CONSTRUCTION JOINTS DMAX 8 MM, SLUMP 200-240 MM		1,559	1,598	1,637	1,711	1,956	2,057
CO ₂ EQ. PER M ³		210 kg	235 kg	265 kg	255 kg	295 kg	340 kg

FUNCTIONAL CONCRETE UNI-GREEN FUNCTIONAL CONCRETE

FUNCTIONAL CONCRETE ACC TO DS/EN 206 DK NA

DKK PER M³ EXCL. VAT

COMPRESSIVE STRENGTH CLASS CYLINDER/CUBE COMPRESSIVE STRENGTH	C20 /25	C25 /30	C30 /37	C35/45	C30 /37	C35/45	C40 /50
ENVIRONMENTAL IMPACT	Passive	Passive	Passive	Passive	Moderate	Aggressive	Extra aggressive
UNI-WINTER® - CONCRETE FOR CONSTRUCTION JOINT	S > 0 ° C					2,288	
CO₂ EQ. PER M³						370 kg	
UNI-WINTER® - CONCRETE FOR CONSTRUCTION JOINT DMAX 8 MM, SLUMP 200-240 MM	S > -5 ° C					2,594	
CO₂ EQ. PER M³						370 kg	
UNI-DRY $^{\circ}$ W/C < 0.40 DMAX 16 MM, CLASS A MATERIALS, SLUMP 60-120 MM				1,695			
CO ₂ EQ. PER M ³				430 kg			
UNI-DRY* SCC-CONCRETE W/C < 0.40 DMAX 16 MM, CLASS A MATERIALS , SLUMP-FLOW 550 MM				1,777			
CO ₂ EQ. PER M ³				440 kg			
UNI-DRY° EXTRA W/C < 0.35 DMAX 16 MM, CLASS A MATERIALS , SLUMP 60-120 MM				1,778			
CO ₂ EQ. PER M ³				490 kg			
UNI-DRY * EXTRA, SCC-CONCRETE W/C <0.35 DMAX 16 MM, CLASS A MATERIALS , SLUMP-FLOW 550 MM				1,865			
CO₂ EQ. PER M³				490 kg			
UNI-READY® SCC-CONCRETE DMAX 16 MM, STONE MIN. CLASS M, STEEL FIBRES	1,507	1,537			1,686		
CO ₂ EQ. PER M ³	230 kg	270 kg			300 kg		
UNI-READY* G1 M32 DMAX 32 MM, SLUMP 60-120 MM, STEEL FIBRES		1,552					
CO ₂ EQ. PER M ³		260 kg					
UNI-READY® G1 M16 DMAX 16 MM, SLUMP 60-120 MM, STEEL FIBRES		1,614					
CO ₂ EQ. PER M ³		260 kg					
UNI-WALL DMAX 16 MM, SLUMP-FLOW 620 MM						1,817	
CO₂ EQ. PER M³						420 kg	

UNI-FUNDA* - 2Y 500 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,479
CO₂ EQ. PER M³	240 kg
UNI-FUNDA * - 2Y 600 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,428
CO₂ EQ. PER M³	240 kg
UNI-FUNDA * - 2Y 700 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,377
CO₂ EQ. PER M³	240 kg
UNI-FUNDA * - 2Y 800 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,352
CO ₂ EQ. PER M ³	240 kg
UNI-FUNDA * - 2Y 900 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,326
CO₂ EQ. PER M³	240 kg
UNI-FUNDA * - 3Y 600 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,581
CO ₂ EQ. PER M ³	240 kg
UNI-FUNDA® - 3Y 700 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,530
CO₂ EQ. PER M³	240 kg
UNI-FUNDA® - 3Y 800 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,479
CO₂ EQ. PER M³	240 kg
UNI-FUNDA® - 3Y 900 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,454
CO ₂ EQ. PER M ³	240 kg


	420 kg
500 mm	2 Y 12 at top and bottom
600 mm	• •
700 mm	Height
800 mm	• •
900 mm	400
600 mm	3 Y 12 at top and bottom
700 mm	• • •
800 mm	Height
900 mm	400
Height	Reinforcement/ Dimension

UNI-GREEN® FUNCTIONAL CONCRETE ACC TO DS/EN 206 DK NA

DKK PER M³ EXCL. VAT

COMPRESSIVE STRENGTH CLASS CYLINDER/CUBE COMPRESSIVE STRENGTH	C20 /25	C25 /30	C30 /37	C35 /45	C30 /37	C35/45	C40 /50
ENVIRONMENTAL IMPACT	Passive	Passive	Passive	Passive	Moderate	Aggressive	Extra ag- gressive
UNI-GREEN ° /UNI-WINTER° - CONCRETE FOR CONSTRUCT	CTION JO	INTS > 0	° C			2,517	
CO₂ EQ. PER M³						280 kg	
UNI-GREEN® /UNI-WINTER® - CONCRETE FOR CONSTRUCT DMAX 8 MM, SLUMP 200-240 MM	TION JOI	NTS > -5	° C			2,853	
CO₂ EQ. PER M³						280 kg	
UNI-GREEN*/UNI-DRY* W/C < 0.40 DMAX 16 MM, CLASS A MATERIALS, SLUMP 60-120 MM				1,865			
CO ₂ EQ. PER M ³				325 kg			
UNI-GREEN° /UNI-DRY° SCC-CONCRETE W/C < 0.40 DMAX 16 MM, CLASS A MATERIALS , SLUMP-FLOW 550 MM				1,955			
CO ₂ EQ. PER M ³				330 kg			
UNI-GREEN°/UNI-DRY° EXTRA W/C <0.35 DMAX 16 MM, CLASS A MATERIALS , SLUMP 60-120 MM				1,956			
CO ₂ EQ. PER M ³				370 kg			
UNI-GREEN $^{\circ}$ /UNI-DRY $^{\circ}$ EXTRA, SCC-CONCRETE W/C <0.35 DMAX 16 MM, CLASS A MATERIALS , SLUMP-FLOW 550 MM				2,052			
CO ₂ EQ. PER M ³				370 kg			
UNI-GREEN*/UNI-READY* SCC-CONCRETE DMAX 16 MM, STONE MIN. CLASS M, STEEL FIBRES	1,658	1,691			1,855		
CO ₂ EQ. PER M ³	175 kg	205 kg			225 kg		
UNI-GREEN® / UNI-READY® G1 M32 DMAX 32 MM, SLUMP 60-120 MM, STEEL FIBRES		1,707					
CO ₂ EQ. PER M ³		195 kg					
UNI-GREEN® / UNI-READY® G1 M16 DMAX 16 MM, SLUMP 60-120 MM, STEEL FIBRES		1,769					
CO₂ EQ. PER M³		195 kg					
UNI-GREEN® / UNI-WALL DMAX 16 MM, SLUMP-FLOW 620 MM						1,999	
CO ₂ EQ. PER M ³						315 kg	

UNI-GREEN® / UNI-FUNDA ® - 2Y 500 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,627
CO ₂ EQ. PER M ³	180 kg
UNI-GREEN® / UNI-FUNDA ® - 2Y 600 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,571
CO ₂ EQ. PER M ³	180 kg
UNI-GREEN® / UNI-FUNDA® - 2Y 700 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,515
CO ₂ EQ. PER M ³	180 kg
UNI-GREEN® / UNI-FUNDA® - 2Y 800 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,487
CO₂ EQ. PER M³	180 kg
UNI-GREEN® / UNI-FUNDA® - 2Y 900 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,459
CO ₂ EQ. PER M ³	180 kg
UNI-GREEN® / UNI-FUNDA® - 3Y 600 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,739
CO₂ EQ. PER M³	180 kg
UNI-GREEN® / UNI-FUNDA® - 3Y 700 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,683
CO ₂ EQ. PER M ³	180 kg
UNI-GREEN® / UNI-FUNDA® - 3Y 800 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,627
CO₂ EQ. PER M³	180 kg
UNI-GREEN® / UNI-FUNDA® - 3Y 900 DMAX 32 MM, PASSIVE ENVIRONMENTAL IMPACT, SLUMP 60-120 MM	1,599
CO ₂ EQ. PER M ³	180 kg

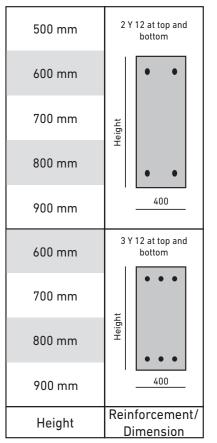

FUNCTIONAL CONCRETE ACC TO DS/EN 206 DK NA

DKK PER M³ EXCL. VAT

COMPRESSIVE STRENGTH CLASS CYLINDER/CUBE COMPRESSIVE STRENGTH	C35/45
ENVIRONMENTAL IMPACT	Aggressive
UNI-DARK S6 - 6% COLOUR DMAX 16 MM, CLASS E MATERIALS, SLUMP 60-120 MM	2,550
CO ₂ EQ. PER M ³	410 kg
UNI-DARK S10 - 10% COLOUR DMAX 16 MM, CLASS E MATERIALS, SLUMP 60-120 MM	2,550
CO ₂ EQ. PER M ³	410 kg
UNI-BRIGHT S4 - 4% COLOUR DMAX 16 MM, CLASS E MATERIALS, SLUMP 60-120 MM, WHITE CEMENT	3,060
CO ₂ EQ. PER M ³	470 kg
UNI-BRIGHT S6 - 6% COLOUR DMAX 16 MM, CLASS E MATERIALS, SLUMP 60-120 MM, WHITE CEMENT	3,060
CO ₂ EQ. PER M ³	470 kg
UNI-LIGHT CLASSIC® DMAX 16 MM, SLUMP 60-120 MM, WHITE CEMENT	2,346
CO₂ EQ. PER M³	475 kg

FUNCTIONAL CONCRETE ACC TO OWN DECLARATION

DKK PER M³ EXCL. VAT

COMPRESSION STRENGTH COMPRESSIVE STRENGTH, CYLINDER MPa	12	16	20	25	30	35	40
CEMENT MORTAR DMAX 4 MM, CLASS P MATERIALS, SLUMP 40-200 MM		1,246	1,283	1,318	1,354	1,390	1,426
CO₂ EQ. PER M³		260 kg	310 kg	340 kg	390 kg	430 kg	560 kg
TOPPING CONCRETE DMAX 8 MM, STONE MIN. AT M, SLUMP 40-200 MM			1,296	1,332	1,368	1,404	
CO ₂ EQ. PER M ³			260 kg	280 kg	320 kg	370 kg	
KERB CONCRETE DMAX 32 MM	1,104	1,136	1,171	1,205	1,238		
CO ₂ EQ. PER M ³	150 kg	170 kg	190 kg	200 kg	220 kg		

FUNCTIONAL CONCRETE ACC TO OWN DECLARATION

DKK PER M³ EXCL. VAT

UNI-FILL TM PIPE PASTE MINERAL MATRIX AND WATER. HIGHLY FLUID CONSISTENCY	1,477
CO₂ EQ. PER M³	480 kg
UNI-FILL TM PIPE FILLING DMAX 8 MM, CLASS P MATERIALS, SLUMP 180-250 MM	1,208
CO ₂ EQ. PER M ³	85 kg
PERVIOUS CONCRETE CONCRETE E16 DMAX 16 MM, CLASS E MATERIALS	1,428
CO ₂ EQ. PER M ³	220 kg
PERVIOUS CONCRETE CONCRETE P32 DMAX 32 MM, CLASS P MATERIALS	1,205
CO ₂ EQ. PER M ³	220 kg

UNI-GREEN® FUNCTIONAL CONCRETE ACC TO DS/EN 206 DK NA

DKK PER M³ EXCL. VAT

COMPRESSIVE STRENGTH CLASS CYLINDER/CUBE COMPRESSIVE STRENGTH	C35 /45
ENVIRONMENTAL IMPACT	Aggressive
UNI-GREEN® / UNI-DARK S6 - 6% COLOUR DMAX 16 MM, CLASS E MATERIALS, SLUMP 60-120 MM CO ₂ EQ. PER M ³	2,805 310 kg
UNI-GREEN® / UNI-DARK S10 - 10% COLOUR DMAX 16 MM, CLASS E MATERIALS, SLUMP 60-120 MM	2,805
CO₂ EQ. PER M³	310 kg

UNI-GREEN® FUNCTIONAL CONCRETE ACC TO OWN DECLARATION

DKK PER M³ EXCL. VAT

COMPRESSION STRENGTH COMPRESSIVE STRENGTH, CYLINDER MPa	12	16	20	25	30	35	40
UNI-GREEN® / CEMENT MORTAR DMAX 4 MM, CLASS P MATERIALS, SLUMP 40-200 MM		1,371	1,411	1,450	1,489	1,529	1,569
CO₂ EQ. PER M³		195 kg	235 kg	255 kg	295 kg	325 kg	420 kg
UNI-GREEN® / TOPPING CONCRETE DMAX 8 MM, STONE MIN. AT M, SLUMP 40-200 MM			1,426	1,465	1,505	1,544	
CO ₂ EQ. PER M ³			195 kg	210 kg	240 kg	280 kg	
UNI-GREEN° / KERB CONCRETE	1.214	1.250	1.288	1.326	1.362		
100% RECYCLED AGGREGATES STONE 4-16 MM	1,214	1,230	1,200	1,520	1,302		
CO ₂ EQ. PER M ³	115 kg	130 kg	145 kg	150 kg	165 kg		

UNI-GREEN® FUNCTIONAL CONCRETE ACC TO OWN DECLARATION

DKK PER M³ EXCL. VAT

UNI-GREEN® / UNI-FILLTM PIPE PASTE MINERAL MATRIX AND WATER. HIGHLY FLUID CONSISTENCY	1,641
CO₂ EQ. PER M³	360 kg
UNI-GREEN * / UNI-FILL TM PIPE FILLING DMAX 8 MM, CLASS P MATERIALS, SLUMP 180-250 MM	1,342
CO ₂ EQ. PER M ³	65 kg
UNI-GREEN * / PERVIOUS CONCRETE CONCRETE E16 DMAX 16 MM, CLASS E MATERIALS	1,587
CO₂ EQ. PER M³	165 kg
UNI-GREEN * / PERVIOUS CONCRETE CONCRETE P32 DMAX 32 MM, CLASS P MATERIALS	1,364
CO ₂ EQ. PER M ³	165 kg

 $_{5}$

ADDITIONAL SERVICES

ADDITIONAL SERVICES

SLUMP 130-160 MM	DKK per m³	43
SLUMP 170-200 MM	DKK per m³	85
SLUMP 210-240 MM	DKK per m³	108
STONE DMAX 16 MM	DKK per m³	62
STONE DMAX 8 MM	DKK per m³	80
M STONE	DKK per m ³	88
A STONE	DKK per m³	151
E STONE	DKK per m ³	161
STRENGTH ACCELERATOR (SPECIAL PRODUCTS ONLY)	Call f	or a price
SET ACCELERATING AGENT (SHORTENS THE BINDING TIME)	DKK per m³	81
SET RETARDING AGENT	DKK per m³	61
EXTENDED CONTROL CLASS	DKK per m³	20
CONCRETE WITHOUT POZZOLANS	DKK per m³	37
CONCRETE WITH ADDED STEEL OR PLASTIC FIBRES	Call fo	or a price
CO ₂ SURCHARGE	DKK per m³	10
ENVIRONMENTAL SUPPLEMENT (EMISSION-FREE UNLOADING WHERE POSSIBLE)	DKK per m³	50
WARM CONCRETE FROM 16 NOVEMBER TO 15 MARCH. WINTER SURCHARGE IS INCLUDED	DKK per m³	78
WINTER SURCHARGE FROM 16 NOVEMBER TO 15 MARCH	DKK per m³	35
TEMPERATURE SIMULATION ACCORDING TO SPECIFICATION	DKK per pc.	2,850
UNI-SMARTROCK (STRENGTH DEVELOPMENT SENSOR)	DKK per pc.	1,500
PREPARATION OF SPECIFIC ENVIRONMENTAL PRODUCT DECLARATIONS (EPDS) PER CONCRETE TYPE	DKK per pc.	1,200
TECHNICAL ASSISTANCE/SITE INSPECTION	DKK per hour	927
ENGINEERING HOUR	DKK per pc.	1,200
MOBILE LABORATORY – ALTHOUGH MIN. 2 HOURS INCLUDING TRANSPORT	DKK per hour	1,145
UNLOADING WITH CONVEYOR BELT	DKK per m³	109
HOWEVER, MINIMUM PER ORDER	DKK	545
LOADS UNDER 7 M ³ (SETTLED PER M ³ UP TO 7M ³)	DKK per m³	120
OPTIONAL 4-AXLE VEHICLE	DKK per m³	30
HANDLING OF RESIDUAL CONCRETE/RETURN CONCRETE, INCLUDING RECYCLING SITE FEE – SETTLED PER WHOLE M ³	DKK per m³	375

PLANNED EXTENDED TIME AT SITE (BILLED PER STARTED 15 MINS.)	DKK per quarter of an hour	175
UNPLANNED EXTENDED TIME AT SITE (BILLED PER STARTED 15 MINS.)	DKK per quarter of an hour	300
FOR LOADS UP TO 7 M³, THE MAX. FREE TIME AT SITE IS 30 MINS. BEYOND THIS, FREE TIME AT SITE IS INCREASED BY 3	3 MIN. PR. M ³ EXCEEDIN	G 7 M ³
TIME ON SITE IS CALCULATED FROM ARRIVAL TO THE CONSTRUCTION SITE AND UNTIL UNLOADING IS OVER.		
LATE CANCELLATION FEE. ACTUAL COST, ALTHOUGH AT LEAST	DKK per m³	58
PLANT PICKUP	DKK	200
PLANT OPENING BY APPOINTMENT (EXCLUSIVE SURCHARGE PER HOUR PER EMPLOYEE ALTHOUGH MIN. 4 HOURS)	DKK	5,500
PRICE PER EMPLOYEE OUTSIDE NORMAL OPENING HOURS 15:00-20:00 ON WEEKDAYS	DKK per hour	386
PRICE PER EMPLOYEE OUTSIDE NORMAL OPENING HOURS 20:00-07:00 ON WEEKDAYS	DKK per hour	773
PRICE PER EMPLOYEE ALL HOURS ON SATURDAYS, SUNDAYS AND HOLIDAYS	DKK per hour	773
NORMAL OPENING HOURS FOR DELIVERY: MONDAY-THURSDAY FROM 07:00-15:00, FRIDAY FROM 07:00-14:00.		

UNICON EMPHASISES THAT NOT ALL PRODUCTS AND SERVICES ARE AVAILABLE AT ALL PLANTS.

ALL PRICES ARE EXCLUSIVE OF VAT.



UNI-GREEN® AND THE GREEN BUILDING COUNCIL

If it is to be easy to build sustainably, it needs to be easy to choose sustainably. That is why we have introduced the UNI-Green® trade mark, which makes green products easier to identify and choose.

From this year, a number of Unicon's popular standard products will be available as UNI-Green®. The products will become part of Unicon's existing product portfolio and appear on our price list alongside the other products.

This way, as a builder and consultant, you can assess sustainability in relation to price so that it becomes clear what commercial value, and thus assurance of future earnings, the sustainable choices will provide.



As a member of the Green Building Council, Unicon will also help customers become DGNB-certified. One of the ways we will do this is by highlighting the positive aspects of ready-mixed concrete in terms of the general environmental accounting for a building, such as long lifetimes, fire safety, flexibility, noise-reducing and indoor climate-regulating properties, and minimal maintenance costs.



Builders

The sustainable choices must provide commercial value and assurance of future earnings.

- · DGNB-certification
- · Voluntary sustainability class
- Maintenance-free building materials



Architects / Consultants

The same familiar properties for readymixed concrete.

- · Fireproof
- · Flexible
- · Climate-regulating
- · Noise-reducing
- · Documentation (EPD, DGNB)



Entrepreneur

The same familiar practicability for readymixed concrete.

- · Workability and finish
- Standard concepts
- · National accessibility

COLLABORATION CREATES MORE SUSTAINABILITY

Sustainable solutions require collaboration on concrete projects or on research & development. At Unicon we have many years' extensive experience of collaboration and active participation in the development of the Danish concrete


We are represented on the S-328 committee of Danish Standards, which defines the standards for sustainable concrete. At Dansk Beton, Unicon sits on the board for the industry alliance and for the Danish Ready Mixed Concrete Association, including in the technical committee.

In research & development, Unicon has been involved in a large number of projects and initiatives alongside stakeholders from across the construction value chain. Most recently, construction. we have been heavily involved in Green Concrete II project, and in the past we have contributed to the developments in e.g. the use of steel fibres, alternative binders and unique applications.

When it comes to specific projects, we collaborate with our customers on a daily basis. This applies not least to large, complex, innovative and sustainable projects.

Going forward, we want to increase our collaborations on innovative, sustainable projects. This is an investment in the future that will allow us to continuously develop our sustainable products and portfolio based on real issues, visionary aspirations and highly practical solutions.

We therefore want to put out an invitation to the entire construction value chain, from builders to architects and engineers to contractors, to get in touch if they want to work with us to push the boundaries of sustainable concrete



READ MORE ABOUT HOW UNICON WILL MEET THE GOVERNMENT'S GOAL OF A 50%-CO₂ REDUCTION BY 2030 IN UNICON'S ROADMAP FOR **SUSTAINABILITY**

RECYCLED CONCRETE

About 15% of the stones, gravel and sand extracted in Denmark on land and at sea is used for concrete production. This is a significant proportion, which can be reduced if crus- cled products on the shelves: hed concrete is recycled into new concrete. Recycling rather than using new raw materials can also result in CO2 savings. • Up to 20% recycled concrete in all passive environmen

THE CIRCULAR ECONOMY ISN'T NEW

Since the 1970s, Unicon has used fly ash, a waste product of concrete. In fact, 4K Beton, which later became part of Unicon, was one of the first producers to use fly ash in Denmark. For the past 25 years, Unicon has also been recycling process water in its production of concrete. This generates a total annual saving of 40 million litres of water and is now standard in all Unicon's plants.

As for recycled concrete, Unicon was a supplier to Sydhavn Recycling Centre in Copenhagen, which won the Sustainable Concrete Award in 2019, and where all aggregates in the concrete were replaced with crushed concrete using 100% recycled concrete.

Since then, recycled concrete has become a standard product at Unicon. Producing no less than 10,000 tons of recycled concrete in 2020, we are a leader in Denmark.

NEXT STEPS UP TO 2030

For next year, the goal is to recycle 20,000 tons of concrete,

Even now in 2020, Unicon can supply recycled concrete throughout Denmark and currently has three standard recy-

- 100% recycled concrete in Unicon-declared concretes,
- All non-structural concretes

If customers want an increased quantity of recycled concrete or concrete for other environmental actions, we can also do this throughout Denmark.

If Unicon has delivered concrete for a structure that is to be demolished, we offer a take-back scheme. As a customer of end of its service life.

In addition, Unicon will develop new concretes with greater recycling, including recycling the fine materials from crushing.



FOCUS AREAS

FOR ACHIEVING THE 2030 TARGET FOR RECYCLED CONCRETE

- Product development to increase recycling
- Optimised logistics, so we can increase recycling

REDUCTION OF CO2 EMISSIONS

cement. That means one factor in particular determines the The cement content can be reduced i.a. by optimising the

SUSTAINED FOCUS ON CO2 FOOTPRINT

of cement. In recent years, Unicon has also been a partner in the innovation projects Green Concrete I and Green Concrete II, which brought about the development of Aalborg

NEXT STEPS UP TO 2030

By 2030, it has to be possible to build using concrete from is an ambition that the entire concrete and construction industry supports, and to which Unicon specifically wants to contribute with CO2-reduced concrete.

This year already, we are launching concrete with a CO, reduction of 25%, and in the coming years we will continue to introduce more concrete types with lower CO, footprints. least, working closely with our customers and participating

We will also produce environmental product declarations (EPDs) for all our products so there is documentation of the



FOCUS AREAS

ON THE WAY TO ACHIEVING THE 2030 GOAL OF **REDUCING CO, EMISSIONS**

- Introduce CO₂-reduced concrete by 2020
- Document CO₂ reductions

GREENER TRANSPORT



FOCUS AREAS

FOR REACHING THE 2030 EMISSION-FREE DELIVERY

NEXT STEPS UP TO 2030

But now Unicon has become the first company to take a step away from fossil-based delivery and is open to testing new technologies when relevant solutions become available.

12 13 **CONTACT INFORMATION**

KEY ACCOUNT MANAGERS - EXCLUSIVELY BUSINESS INQUIRIES, PRIVATE CUSTOMERS ARE REFERRED TO CUSTOMER SERVICE



Allan Dahl Senior Key Account Manager 26 89 13 00 allan.dahl@unicon.dk



Flemming Grand Key Account Manager 26 88 49 84 flemming.grand@unicon.dk



Keld Fischer-Pedersen Key Account Manager 26 88 49 33 keld.f.pedersen@unicon.dk



Jesper Matzen Key Account Manager 21 41 91 01 jesper.matzen@unicon.dk



Lars Haupt Key Account Manager 26 86 31 69 lars.haupt@unicon.dk



Jimmy Irsbøl Key Account Manager 29 40 75 83 jimmy.irsbol@unicon.dk

AREA MANAGERS IN PRODUCTION

René Fournaise

26 88 49 58

Key Account Manager

rene.fournaise@unicon.dk



Henrik Walther Larsen Area manager North and East Jutland 20 43 46 76 henrik.w.larsen@unicon.dk



Poul Rasmussen
Area manager
West and South Jutland
20 40 26 68
poul.rasmussen@unicon.dk



Kent Florszak
Area manager
The Triangle Area and Funen
29 25 44 81
kent.florczak@unicon.dk



Area manager Copenhagen

TBD



Jacob Christensen
Area manager
Zealand
23 62 62 02
jacob.christensen@unicon.dk

LOGISTICS

Logistics handles all inquiries that concerns ordering and logistics of concrete and concrete pumping.

Dispo Centre Northern Region 70 10 05 60
Dispo Centre Southern Region 70 10 05 70
Dispo Centre Eastern Region 70 13 03 60

CUSTOMER SERVICE

Customer service handles private inquiries as well as everyone inquiries that are not concerning ordering of concrete.

Customer service Northern Region 70 10 05 61 - nord@unicon.dk
Customer service Southern Region 70 10 05 71 - syd@unicon.dk
Customer service Eastern Region 70 10 05 81 - ost@unicon.dk

YOU ALWAYS HAVE THE OPTION TO ORDER REQUEST ONLINE ON UNICON.DK

PAYMENT

UNICON A/S - CVR (CRN) NO.: 16 06 49 39

Account no.: Danske Bank 3100 0005401828

Please contact our administration for further information. Tel: +45 70 10 05 90 e-mail: info@unicon.dk

FOR THE UPDATED VERSION OF THE PRICE LIST, SEE UNICON.DK

1 PRICES/VOLUMES

- 1.1 The prices are stated per m³ exclusive of VAT and environmental/ regulatory taxes valid on the day of delivery, free delivered at a delivery address within the normal market area of the plants.
- 1.2 The prices are based on delivery of full loads within the opening hours and delivery times specified in the pricelist. A surcharge will be calculated for delivery outside the specified hours as well as for delivery of volumes smaller than the quantities specified in the pricelist.
- 1.3 The concrete volume stated in the delivery note represents the volume of the concrete with the targeted air content.
- 1.4 On-site time exceeding the maximum time stated in the price list will be charged according to the current price list.
- 1.5 Unicon A/S will invoice all deliveries in accordance with the pricelist valid on the day of delivery.

2 PAYMENT

- 2.1 Up to date of invoice plus 8 days net (private customers).
- 2.2 Up to current month + 15 days net.
- 2.3 Interest is charged for late payments, in addition a reminder fee of up to DKK 100 is imposed when sending a written reminder, according to interest law.

3 DELIVERY

- 3.1 It is the buyer's responsibility to obtain the necessary permits for setting up in trafficked areas, and notify at the site where delivery takes place.
- 3.2 The delivery is delivered and unloaded at the place of use or as close to it as conditions allow. If the buyer requests delivery across surfaces with insufficient bearing capacity, all consequential damages are at the expense of the buyer.
- 3.3 The delivery time is when the delivery has arrived at the delivery address or been picked up at the factory.
- 3.4 We will strive to deliver within 15 mins. prior to, and up to 30 mins. after, the agreed delivery time.

4 CHANGES

- 4.1 Should the buyer wish to change the date of delivery for an order/part order in full discharge, the buyer must give such notice before 12.00h on the day before the agreed time of delivery.
- 4.2 Should the buyer wish to change ordered agreements, this is to be executed in writing.

5 INSPECTION UPON RECEIPT

Prior to unloading, the buyer shall check the specifications of the delivery note, and during unloading the buyer is to maintain visual control to make sure that the delivery is in accordance with the order. The buyer or his representative must sign the delivery note to confirm receipt of delivery and furthermore to confirm that the specifications of the delivery note are in accordance with the required specifications of the supply ordered by the buyer.

CONCRETE CONTROL

- 6.1 Unicon A/S' plants are certified by Dancert, which ensures that the supplies are in conformity with present standards and regulations.
- 6.2 Unicon A/S' quality control system is pursuant to DS/EN ISO 9001 and ensures that concrete quality and quality control are documented in conformity with present standards and regulations.
- 6.3 Individual results as well as the statistics of the results of the internal quality control are available to buyer subject to written agreement.
- 6.4 If no other written agreement has been made, Unicon A/S' internal quality control shall serve as documentation.
- 6.5 Unicon A/S guarantees that the delivered concrete on the date of delivery is
 as a minimum in accordance with the specifications of the delivery note.

7 USE OF PRODUCT AND FINISHING

- 7.1 Unicon A/S is without liability, if the buyer has ordered a concrete supply which is not suitable for the purpose or the casting conditions.
- 7.2 Unicon A/S is not liable for quality reduction, caused by premature desiccation, inadequate compression, covering or finishing. Unicon A/S is not liable for colour differences or other circumstances caused by change of specifications, including changes of the specifications made by Unicon A/S' material suppliers, in standing orders.
- 7.3 Any addition to the concrete on the buyer's behalf is at buyer's own risk.

8 LIABILITY FOR DEFECTS/WARRANTY LIABILITY

- 8.1 The supply is delivered with a 5-year supplier liability for defects in conformity with the regulations of AB 18, section 12 paragraph 5.
- 8.2 If the buyer is also the builder and carries out the work himself, the 5-year term is calculated from the date of delivery.
- 8.3 If a builder can prove that a claim for defects can only be put through to the buyer with large difficulties, the claim can be made directly on Unicon A/S.

9 PRODUCT LIABILITY

- Unicon A/S is liable for damages, if it can be proved that the said damage is caused by a defective supply.
- 9.2 Unicon A/S has taken out product liability insurance.
- 9.3 Should Unicon A/S be subject to product liability against any third party, the buyer is obligated to indemnify Unicon A/S from that part of the claim for compensation, which exceeds DKK 15 million. In case of a trial, the buyer shall let himself be sued at the same court of law that is hearing the claim against Unicon A/S.

10 LIMITATION OF LIABILITY

In the event of liability for defects in a delivery (including product liability) and delay, Unicon A/S' liability does not include operating loss, loss of time, loss of profit or other indirect loss. In the event of liability for delay or defects in a delivery, Unicon A/S' liability cannot exceed the price of the delayed/defective delivery.

In the event of downtime, machine damage or other breakdown of concrete pumps, Unicon A/S assumes no liability and no compensation shall be paid.

11 COMPLAINTS

The buyer's written claim stating the nature and scope of the claim shall be handed over to Unicon A/S immediately after (no more than 10 days after delivery) that the buyer knew or ought to have known the circumstances causing the claim. If such notice is not given, any future claim will be forfeited.

12 FREEDOM OF LIABILITY (FORCE MAJEURE)

Unicon A/S is not liable for delays caused by circumstances mentioned in AB 18 section 39.

13 CONSULTING


Unicon A/S will provide consulting to the buyer to the best of its ability with regard to choice of products, their functions and suitability to specific purposes. It is expressly agreed that such technical consulting or assistance, which is provided without separate charge, does not make Unicon A/S liable or impose obligations with regard to such consulting and assistance, or for results achieved. Liability in addition to this is only accepted by Unicon A/S if Unicon A/S has provided separate written consulting to the buyer in the form of the preparation of actual calculations or in the form of separate written statements regarding the usability of what is sold for a specially indicated purpose to a buyer, which may not be expected to have sufficient professional knowledge in the area to independently evaluate the question of the product's suitability. Unicon A/S' liability is limited to no more than DKK 100,000 in case of incorrect consulting and does not cover operations loss, loss of time, loss of profit or other indirect loss. Unicon A/S is not liable for statements that are based on estimated assessments or an evaluation.

14 DISPUTES

Disputes, if any, between the parties shall be settled by arbitration at the Danish Court of Arbitration for the Building and Construction Industry.

Rev. November 2020

14 15

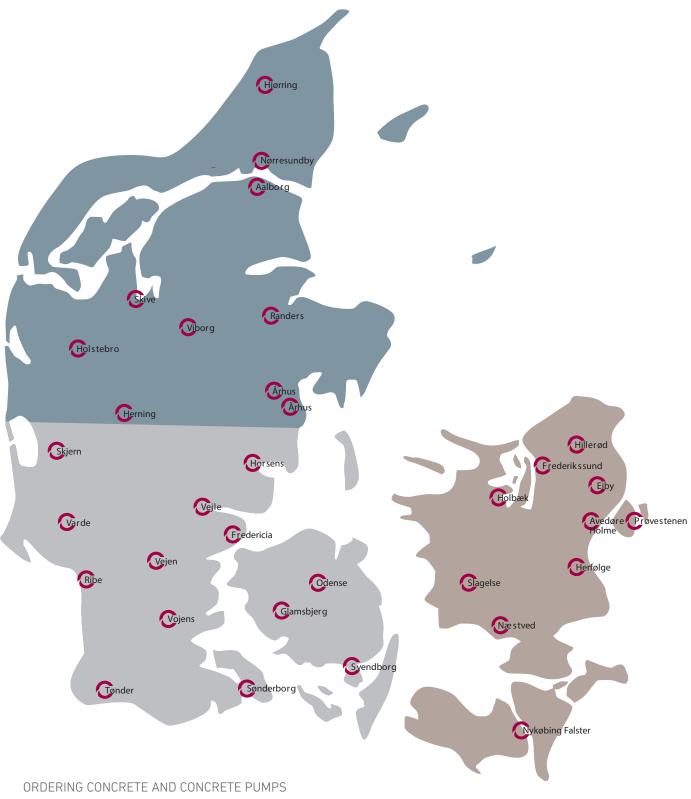

Contact the factory directly by using the postal code after calling the "quick call" number 70130301

--- Call 70 10 05 60

--- Call 70 10 05 70

---- Call 70 13 03 60

